


ATP test side-by-side comparison image

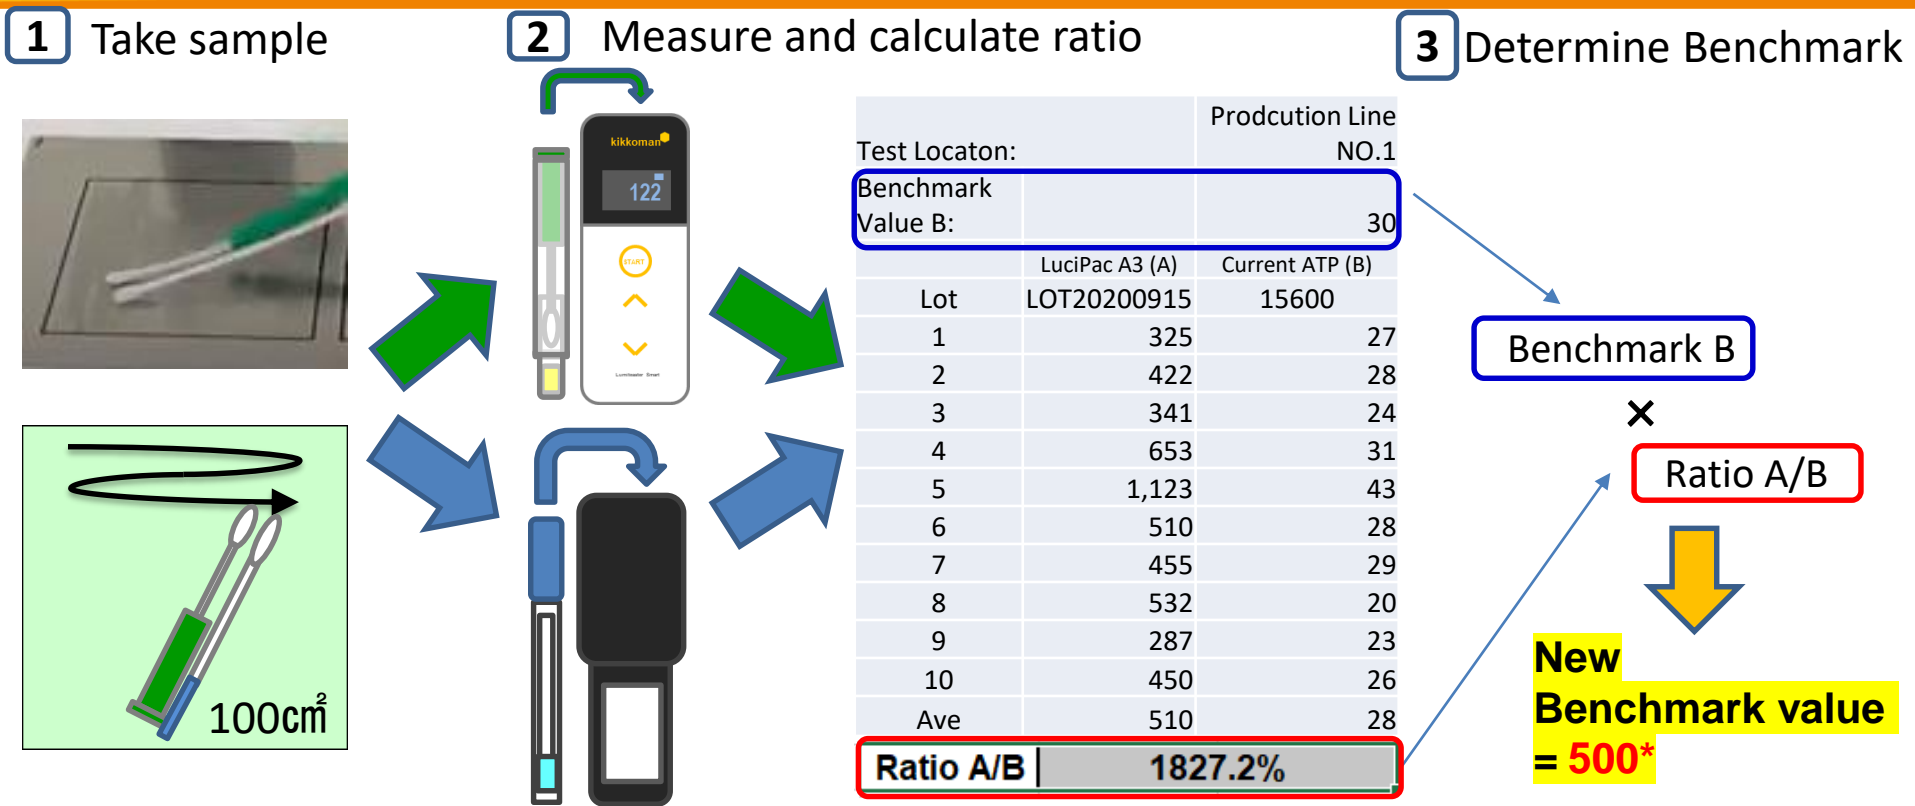

1. Hold two swab devices, the LuciPac A3 ATP test and current ATP test, and swab the test site with them, simultaneously.
2. Measure RLU, respectively, and calculate a ratio (A/B) between the measurement values of the LuciPac A3 ATP test (A) and current ATP test (B).
3. Determine the benchmark value for the LuciPac A3 ATP test by multiplication the coefficient (A/B) by the present benchmark value.

* Round to the nearest tens value for a simpler benchmark value.