
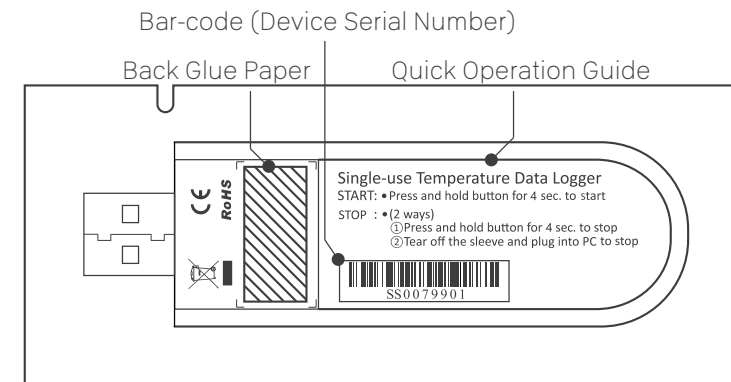


Single-Use Temperature Data Logger

- Automatically generate report, no need any software
- Protection Degree - IP 67
- Professional calibration certificate, Quality Guarantee
- CR2032 wide temperature battery, stable performance, reliable data
- Support typing logistics information, convenient to manage and trace

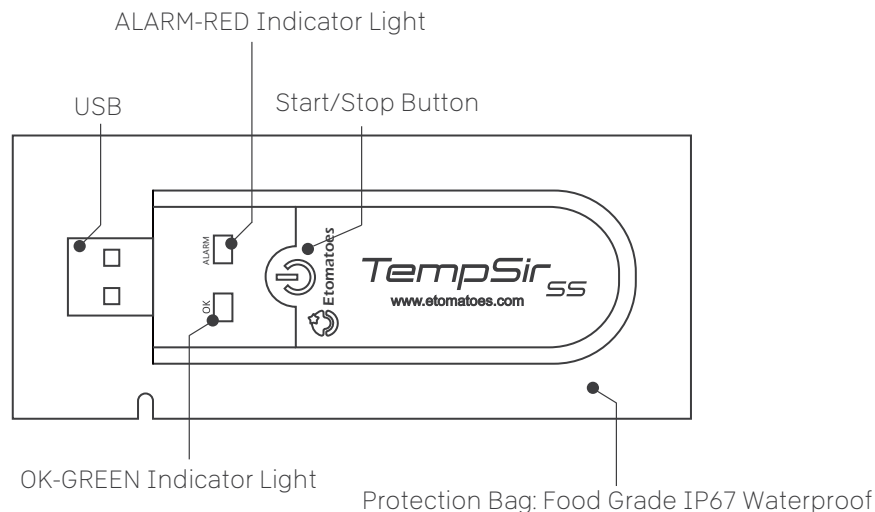

I. Operating Instructions

- 1. Start the logger:** When the device is under configuration status, press "START" button and hold for more than 4 seconds, the GREEN light flashes 5 times.
- 2. Stop the logger:**
 - 1) When the device is under configuration status, press "STOP" button and hold for more than 4 seconds, the RED light flashes 5 times.
 - 2) Connect the logger to computer's USB port, the RED light flashes 5 times.
- 3. Get A Report:** The report is automatically generated when the device is connected to the computer. Alternating flashing RED light and GREEN light means that a report is being generated, when the generation is completed, the RED LED and GREEN LED will light at the same time.


II. Status Illustration

- 1. Configuration status:** Press the button, if Red LED and Green LED flash one time at the same time, it means the device is under configuration status.
- 2. Start-delay:** Press the button, if Green LED flashes every 2 or 5 seconds, it means the device is under start-delay status.
- 3. Recording status:** Press the button, Green LED flashing 1 time means No Alarm, OR Red LED flashing 1 time means With Alarm.
- 4. Stop status:** Press the button, Green LED flashing 2 times means No Alarm, OR Red LED flashing 2 times means With Alarm.

III. Technical Specifications

Model	SS
Type	Single-Use Temperature Data Logger
Temperature Range	-30°C~+70°C
Accuracy	±0.5°C
Report Format	PDF&CSV
Resolution	0.1°
Battery	CR2032(Wide Temperature)
Shelf Life	12Months
Recording Capacity	16000Points
Log Cycle/Interval	90Days /10Min (standard-others on request)
Start Delay	10Min (standard-other options on request)
Button Function	Start/Stop/Status Query
LED Indicator Light	Alarm/No Alarm/Status Query
Size	97*45*8mm
Waterproof	IP67
Port	USB2.0

IV. Get A Report

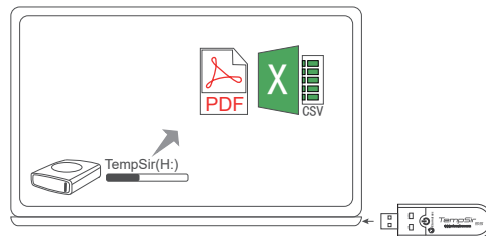

The report is automatically generated when the device is connected to the computer. Alternating flashing Red LED and Green LED means that a report is being generated, and stopping flashing lights means a report generation is complete.

V. After-sales Service



FMCG Industry Solutions Pty Ltd

ABN 22 135 446 007

📍 Factory 11A, 1 - 3 Endeavour Rd, Caringbah NSW 2229

🌐 www.fmcgis.com.au

✉ sales@fmcgis.com.au

☎ 1300 628 104 or 02 9540 2288